
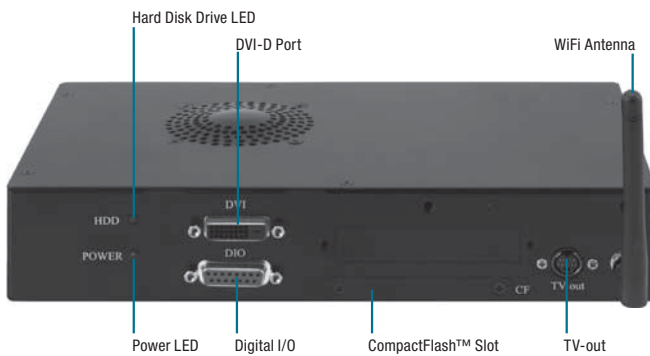


# TKS-G50

Computing Platform Service Partner

## Chassis Kit for SubCompact Boards

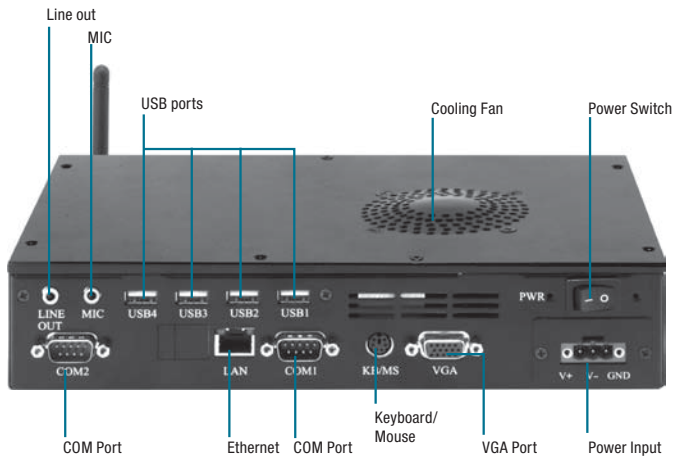

## Features

- One 6cm System Cooling Fan
- VGA/ DVI (Optional)/ TV-out (Optional)
- 2.5" Hard Disk Drive and CompactFlash™
- 802.11b/g WiFi (Optional)
- 2 COM/ 4 USB/ 8 Digital I/O
- Built-in AC-in or DC-in Power Supply
- Desktop or Wallmount (optional)



## Specifications

System		
CPU Board Support		GENE-9310 / GENE-8310
Display	VGA	D-Sub 15 x 1
	TV-out	S-Video x 1 (optional)
	DVI	DVI-D x 1 (optional)
Storage	SSD	Type II CompactFlash™ Slot x 1
	HDD	2.5" Hard Disk Drive Bay x 1
LAN	Ethernet	RJ-45 x 1
	Wireless	802.11b/g WiFi Kit (optional)
System I/O	PS/2 Port	PS/2 x 1 for keyboard and mouse through Y-cable
	Serial Port	D-Sub 9 x 2
	USB Port	USB Type A x 4
	Digital I/O	8-bit programmable (optional)
	Audio	Line-out, Mic
LED Indicator		Power LED x 1, HDD LED x 1
Power Supply	DC Input	AT or ATX type, +9V ~ +30V Input
	AC Input	AT type, 100V ~ 240V Input
System Cooling		6cm cooling fan x 1
Mechanical & Environmental		
Operating Temperature		32°F ~ 104°F (0°C ~ 40°C)
Vibration		0.5g rms/ 5~500Hz/ random operation
EMC		CE /FCC class A
Dimensions		10" x 5.75" x 2.1" (254mm x 146mm x 53mm)
Construction		Heavy duty steel
Mounting		Desktop or Wallmount (Optional)
Color		Black

## Ordering Information

- TF-TKS-G50-8310-002-DX/DT/AT**  
Chassis Kit, GENE-8310-A11, Celeron M 1.0GHz (DX: DC-ATX / DT: DC-AT / AT:AC-AT)
- TF-TKS-G50-8310-003-DX/DT/AT**  
Chassis Kit, GENE-8310-A11, Celeron M 1.3GHz (DX: DC-ATX / DT: DC-AT / AT:AC-AT)
- TF-TKS-G50-8310-004-DX/DT/AT**  
Chassis Kit, GENE-8310-A11, Celeron M 1.5GHz (DX: DC-ATX / DT: DC-AT / AT:AC-AT)
- TF-TKS-G50-9310-001-DX/DT/AT**  
Chassis Kit, GENE-9310-A10 (DX: DC-ATX / DT: DC-AT / AT:AC-AT)

## Optional Accessories

- 9761G50000**  
Wallmount Kit
- 9741666646**  
802.11b/g Wireless LAN Kit

**Dimension** Unit: mm

